

RM31300


3U Open Bay Server Chassis



Rear View




Inside View

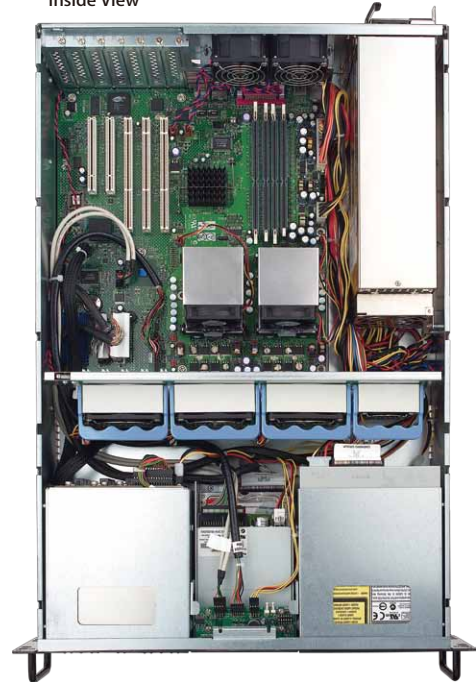

6 x 5.25" bays for ODD or storage kits



3 x 3.5" bays for FDD, SK41203 or SK51201



Tool-less locks for 5.25" bays



Optional 4 x middle hot-swap fan



Enforcing 2 x rear 80mm fans

Features & Benefits

- Support M/B up to 12" x 13"
- Exposed 6 x 5.25" and 3 x 3.5" bays for maximum configuration flexibility
- Compatible with CHENBRO SK family for HDD hot-swap function
- Optional 4 x hot-swap fan modules
- Tool-less design on 5.25" device installation
- Support 2U single and 2+1 redundant PSU

Specification

Model Name	• RM31300
M/B Form Factor	• Extended ATX (12" x 13")
Dimension (D x W x H)	• 660 x 430 x 132 (mm), 26" x 16.9" x 5.2"
Drive Bay	• Exposed: 6 x 5.25", 3 x 3.5"
PSU Form Factor	• 2U Single or 1+1 Redundant
Indicator	• 1 x Power Status, 1 x HDD Activity, 2x LAN Activity • 1 x Fan Failure and Overheat
Front Control	• Power On/Off, Alarm Mute, System Reset, 2 x USB 2.0
System Security	• Intrusion Switch
Cooling Fan	• Middle: 4 x 80mm (T=32mm) • Rear: 2 x 80mm (Option)
Slot Opening	• 7 x Full Height and Full Length
HDD Backplane	• N/A
Metal Thickness	• 1.2mm
Net Weight	• 12.3kg
Gross Weight	• 16.4kg
Front Bezel	• Option
Cubic Feet	• 5.07
Container Info ,Single Packing	• 20': 196, 40': 404, 40'H: 454

Optional Items

	Order Code	Description
Storage Kit	◆ Note1.	2.5" or 3.5" HDD storage kits
Bracket	84H331310-009	For C2W-5820V/5620V PSU
Slide Rail	84H321510-022	26", Ball Bearing
	84H321710-041	26", Ball Bearing, Tool-less
Bezel	88H331200-001	3U, Plastic(Stripe)
	84H331310-001	3U, Plastic(SilFox)
	84H331610-032	3U, Plastic(Bricker)
◆ Note1. SK51201 / SK41203 / SK32303 / SK33502 / SK33503 / SK31101 / SK41101 / SK41202		

※ PSU ※ M/B Support ※ I/O Gasket ※ Air Duct ※ (Please refer above of information from CHENBRO web)

Order Information

Order Code	M/B	Backplane	Cooling Fan(mm)	PCI Slot	PSU	Slide Rail
RM31300	12"x13"	N/A	4x8032	7 x FF	Option	Option